

**Conduction Cooled PCI Mezzanine Card (CCPMC)
Draft Standard**

VITA 20 - 199x

Draft 1.8
July 21, 1999

This draft standard is being prepared by the VITA Standards Organization (VSO) and is unapproved.

Do not specify or claim conformance to this draft standard.

VSO is the Public Domain Administrator of this draft standard and guards the contents from change except by sanctioned meetings of the task group under due process.

VITA Standards Organization
7825 East Gelding Drive, Suite 104
Scottsdale, AZ 85260
Ph: 602-951-8866 Fx: 602-951-0720
Hp: <http://www.vita.com/>

Do not specify or claim conformance to this draft standard

Table of Contents

1. Introduction..... 7

1.1 Terminology, Definitions and Abbreviations..... 7

1.2 References 8

1.3 Standard Terminology..... 8

2. CCPMC Specification 10

2.1 Requirements..... 10

2.2 Compatibility 11

2.3 Theory of Operation and Usage 12

 2.3.1 Component Layout..... 12

3. Conduction Cooled PCI Mezzanine Card Mechanics..... 13

4. Conduction Cooled Host Card Mechanics 15

5. Thermal Characteristic 17

List of Figures

FIGURE 2-1 DIAGRAM OF SINGLE CCPMC FITTED ONTO A HOST CARD 10

FIGURE 3-1 CCPMC MEZZANINE MODULE..... 14

FIGURE 4-1 CCPMC HOST MODULE..... 16

FIGURE 5-1 THERMAL INTERFACE DEFINITIONS 19

List of Tables

TABLE 2-1 COMPATIBILITY MATRIX 11

Do not specify or claim conformance to this draft standard

Abstract

This standard defines the methodology and implementation details to allow the creation of conduction cooled PMC modules to ensure electrical and physical compatibility with various host card modules onto which conduction cooled PMCs are mounted.

Foreword

The VMEbus has become the open standards bus of choice for a wide range of diverse industrial and military computing applications, with hundreds of manufacturers providing thousands of unique and diverse products to the market.

The addition of industry standard mezzanine modules - like PMC - to VMEbus base (or host) boards, expands the on-board capability and enables those boards to be easily modified to meet the intended applications.

As PMC becomes the pervasive and defacto industry standard for mezzanine cards in the air cooled VMEbus market, there is a need to transition this technology into the conduction cooled market segment. The goal of this standard is to allow the intermixing of different vendors air and conduction cooled PMC modules onto air and/or conduction cooled host card modules to the maximum extent possible. Intermixing of air cooled PMC and conduction cooled PMC mezzanine modules on a single type of base/host card is generally intended for development purposes only.

Do not specify or claim conformance to this draft standard

VITA 20-199x Draft Standard

The following people are active participants and form the Task Group Balloting body:

Task Group Participants

	Name	Phone	Email
1.	Jing Kwok	(613) 596-6417	jkwok@dy4.com
2.	Harry Andreas	(310) 334-8004	handreas@west.raytheon.com
3.	Douglas Endo	(310) 334-7785	dendo@ west.raytheon.com
4.	Frank Hom	(619) 452-9333	fhom@elsol.com
5.	Larry Thompson	(812) 854-5949	larryt@kiva.net
6.	Alan Storrow	44-1327-359444	storrow@radstone.co.uk
7.	Gorky Chin	(805) 257-4430	gorky@vistacc.com
8.	Mike Macpherson	(805) 257-4430	mac@vistacc.com
9.	John Rynearson	(602) 951-8866	techdir@vita.com
10.	Robert McKee	(703) 883-5484	rmckee@mitre.org
11.	Dion Ritzema	(314) 232-3071	dion.f.ritzema@boeing.com
12.	Jerry Braun	(812) 854-5328	braun_j@crane.navy.mil
13.	Duncan Young	(613) 599-9199	dyoung@dy4.com
14.	Ivan Straznicky	(613) 599-9199	istraznicky@dy4.com
15.	Hans Ohman	(613) 599-9199	hohman@dy4.com

-- The following 7 sections will not be included in the final standard --

Comments, Corrections and/or Additions

Anyone wishing to provide comments, corrections and/or additions to this proposed draft standard, please direct them to the Task Group chair:

Jing Kwok, VITA 20 Chair & Draft Editor
DY 4 Systems Inc.
333 Palladium Drive
Kanata, Ontario, Canada
K2V 1A6

Phone: 613-599-9199 Fax: 613-599-7777
Email: jkwok@dy4.com Web site: <http://dy4.com>

Do not specify or claim conformance to this draft standard

The best method to provide corrections and small additions is via marking up the specific pages and faxing them to the chair. For longer additions, please provide textual information via email. This draft standard has been prepared and is being edited in Microsoft Word 97, under Windows 95.

VSO and Other Standards

Should anyone want information on other standards being developed by VSO, VME Product Directories, VME Handbooks, or general information on the VME market, please contact the VITA office at the address or phone number given on the front cover. Copies of the VSO minutes plus VSO meeting announcements and agenda can be retrieved from VITA Home Page listed on the front cover. Copies of various draft standards can also be downloaded from VITA Home Page.

Change Bars

All paragraphs changed in this draft from draft 0.0 are marked with a change bar on the right side of the paragraph. Any table entry that was changed will have a double bar on the right side of changed entry.

Draft Summary

Draft 1.7 represents a major reformatting of draft 1.6 and therefore change bars have been purposely omitted. The following table provides a list of the major changes made to each draft over the previous draft.

Do not specify or claim conformance to this draft standard

Draft History

Draft No.	Date	Comments and Major Changes/Updates
1	96/03/15	- First draft
1.1	96/09/05	- changed from ccPMC to CCPMC - added rules - added diagrams - added concept of fixed rib and removable rib host cards
1.2	97/01/09	- added concept of CCPMC with faceplate I/O
1.3	97/05/09	- incorporate changes from March meeting - disallow components in the faceplate area on host card - increase the number of mounting holes on the host card - changed thermal impedance to 0.2 °C/watt
1.4	97/05/15	- changed drawing to landscape format
1.5	97/11/17	- added changes from Sept 97 meeting
1.6	98/01/09	- added changes from Nov 97 meeting, editorial clarifications, reformatting for standards consistency
1.7	99/01/13	- proposed changes for Jan 97 meeting: goals of specification, inclusion of secondary cooling interface, methodology for specifying thermal performance of different PMCs on different host cards.
1.8	99/07/21	- inclusion of secondary thermal interfaces as optional. - final draft prior release to vote.

Task Group Ballot

When submitted to the Task Group for a formal ballot, all VSO Policy & Procedure Requirements for draft standards must be met. The requirement states that at least 75% of the ballots sent must be returned and that 75% of those must be affirmative to pass the Task Group Balloting phase. Upon successful Task Group Balloting, the draft standard is then forwarded through the VSO to ANSI for the Canvass Balloting Phase.

Do not specify or claim conformance to this draft standard

Chapter 1

Introduction

1. Introduction

This standard defines the mechanical and thermal interface for a conduction cooled PCI mezzanine card (CCPMC) to allow compatible intermatability of products. Typical usage would be for a CCPMC module to be fitted on top of a host VMEbus card that conforms to IEEE 1101.2-1992, Standard for Mechanical Core Specifications for Conduction-Cooled Eurocards. However, it is possible for a CCPMC card to be fitted to any other host card as long as that host card presents a mechanical and thermal interface that conforms to this specification.

This standard is based on IEEE 1386.1, Standard Physical and Environmental Layers for a PCI Mezzanine Card: PMC.

1.1 Terminology, Definitions and Abbreviations

The following terminology, definitions and abbreviations are utilized throughout this document and are stated here for clarification.

Air cooled

A methodology of cooling active and passive components on a CCA by utilizing either natural free, or forced air convection from an area of higher temperature to lower temperature.

ATR

Abbreviation for Austin Turnbull Radio (or Air Transport Rack)

CCA

Abbreviation for Circuit Card Assembly

CCPMC

Abbreviation for Conduction Cooled PCI Mezzanine Card

Conduction cooled

A methodology of cooling active and passive components on a CCA by utilizing direct heat conduction from an area of higher temperature to lower temperature.

Host Card

A module that inserts into a mother board (or backplane) which holds a mezzanine card.

Mezzanine Card

An add-on printed circuit board (PCB) which is mounted parallel to a host (or base) computer board module.

PCI

Peripheral Component Interconnect

Do not specify or claim conformance to this draft standard

PMC

Abbreviation for PCI Mezzanine Card

Thermal Interface

Physical area specifically allocated for direct mechanical contact for the conduction of heat from a lower level assembly to a higher level assembly.

1.2 References

IEEE 1101.2-1992	Mechanical Core Specifications for Conduction Cooled Eurocard
ANSI/VITA 1-1994	VMEbus standard
VITA 1.1-199x	VME64 Extensions Draft Standard
IEEE P1386-199x	CMC Draft Standard
IEEE 1386.1	PMC specification
IEEE 1101.1	Eurocard specification
ISO 4527	Autocatalytic Nickel Phosphorus Coatings - Specification and Test Methods
ISO 7599	Anodizing of Aluminum and Its Alloys - General Specification for Anodic Oxide Coating on Aluminum

1.3 Standard Terminology

To avoid confusion and to make very clear what the requirements for compliance are, many of the paragraphs in this standard are labeled with keywords that indicate the type of information they contain. The keywords are listed below:

Rule
Recommendation
Suggestion
Permission
Observation

Any text not labeled with one of these keywords describes the structure or operation. It is written in either a descriptive or a narrative style. These keywords are used as follows:

Rule <chapter>.<number>:

Rules form the basic framework of this draft standard. They are sometimes expressed in the text form and sometimes in the form of figures, tables or drawings. All rules shall be followed to ensure compatibility between board and backplane designs. All rules use the words “**shall**” or “**shall not**” to emphasize the importance of the rule. The words “shall” or “shall not” are reserved exclusively for stating rules in this draft standard and are not used for any other purpose.

Recommendation <chapter>.<number>:

Wherever a recommendation appears, designers would be wise to take the advice given. Doing otherwise might result in some awkward problems or poor performance or some levels of incompatibility. While the architecture has been designed to support high-

Do not specify or claim conformance to this draft standard

performance systems, it is possible to design a system that complies with all the rules but has abysmal performance. In many cases a designer needs a certain level of experience in order to design boards that deliver top performance. Recommendations found in this standard are based on this kind of experience and are provided to designers to speed their traversal of the learning curve. All recommendations use the words “**should**” or “**should not**” to emphasize the importance of the recommendation. The words “should” or “should not” are reserved exclusively for stating permission in this draft standard and are not used for any other purpose.

Suggestion <chapter>.<number>:

A suggestion contains advice which is helpful but not vital. The reader is encouraged to consider the advice before discarding it. Some design decisions that need to be made in the designing boards are difficult until experience has been gained. Suggestions are included to help a designer who has not yet gained this experience. Some suggestions have to do with designing boards that can be easily reconfigured for compatibility with other boards, or with designing the board to make the job of the system integration and debugging easier.

Permission <chapter>.<number>:

In some cases, a rule does not specifically prohibit a certain design approach, but the reader might be left wondering whether that approach might violate the spirit of the rule or whether it might lead to some subtle problem. Permissions reassure the reader that a certain approach is acceptable and will cause no problems. All permissions use the words “**may**” or “**may not**” to emphasize the importance of the permission. The lower-case “may” words are reserved exclusively for stating permissions in this draft standard and are not used for any other purpose.

Observation <chapter>.<number>:

Observations do not offer any specific advice. They usually follow naturally from what information has just been presented. They spell out the implications of certain rules and bring attention to things that might otherwise be overlooked. They also give the rationale behind certain rules so that the reader understands why the rule must be followed.

Do not specify or claim conformance to this draft standard

Chapter 2

CCPMC Specification

2. CCPMC Specification

2.1 Requirements

Mezzanine cards are generally utilized to maximize the available board surface area of a CCA mounted into a physical backplane/chassis slot. Typical applications of these would include conduction and air-cooled ATR card cages and chassis. Figure 2-1 illustrates a single size PMC mezzanine card mounting onto a host card as defined by this standard. Host VMEbus cards can typically accommodate 1 or 2 PMC modules. Mounting and pin-outs are defined in the related CMC and PMC standards.

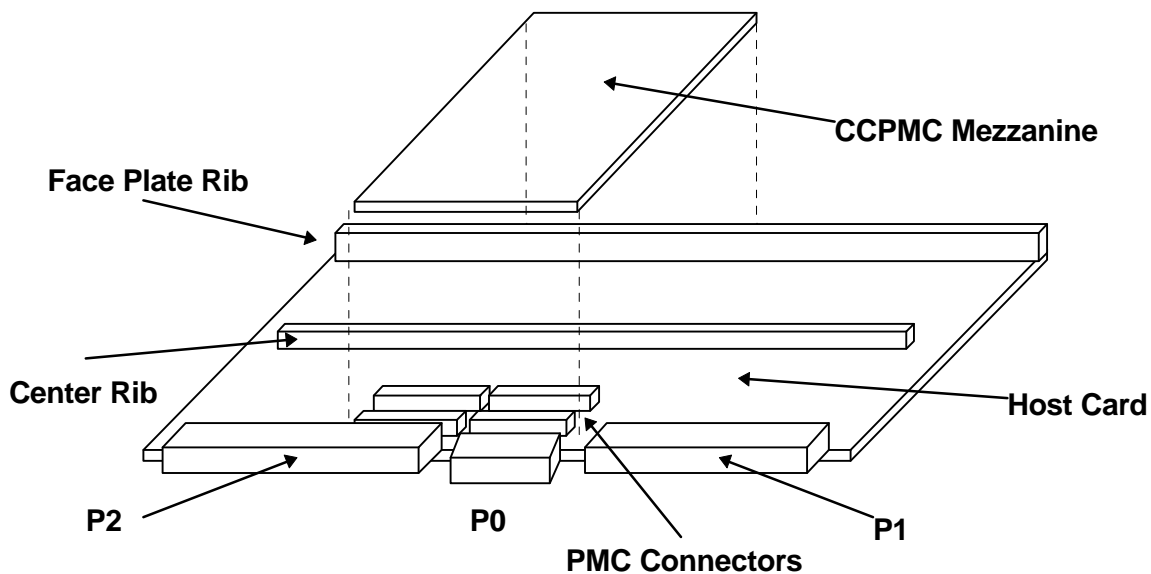


Figure 2-1 Diagram of single CCPMC fitted onto a host card

There can be four types of mezzanine cards applicable to this standard:

1. Air cooled mezzanine cards with faceplate I/O
2. Air cooled mezzanine cards without faceplate I/O (backplane I/O)
3. Conduction cooled mezzanine cards with faceplate I/O
4. Conduction cooled mezzanine cards without faceplate I/O (backplane I/O)

Do not specify or claim conformance to this draft standard

There are also three types of host cards:

1. Air cooled Host cards
2. Conduction cooled Host cards with fixed ribs
3. Conduction cooled Host cards with removable ribs

2.2 Compatibility

The following table describes the compatibility between mezzanine cards and the host card. “Fully compatible” means that the mezzanine card can be fitted on top of that host card without interference. The goal is that all conduction cooled mezzanine cards can be fitted on both air cooled and conduction cooled host cards and air cooled mezzanine cards without faceplate I/O can be fitted on conduction cooled host cards.

Table 2-1 Compatibility Matrix

	Air cooled mezzanine cards with faceplate I/O	Air cooled mezzanine cards without faceplate I/O	Conduction cooled mezzanine cards without faceplate I/O	Conduction cooled mezzanine cards with faceplate I/O
Air cooled host card	fully compatible	fully compatible	fully compatible	fully compatible
Conduction cooled host card (fixed rib)	not compatible	not compatible (note 1)	fully compatible (note 4)	not compatible (note 4)
Conduction cooled host card (removable rib)	lab compatible (note 2)	lab compatible (note 2)	fully compatible (note 4)	fully compatible (note 3)

Notes:

1. Air cooled mezzanine cards without faceplate I/O could be compatible with conduction cooled host cards with fixed ribs if components on the mezzanine do not interfere with the stiffening ribs on the host card.
2. Although air cooled mezzanine cards can be fitted on conduction cooled host cards with removable ribs, these mezzanine cards may not have been designed to operate in a deployable environment. It is envisioned that this combination would be used in a laboratory/prototyping environment only.
3. Conduction cooled mezzanine cards with faceplate I/O can not rely on the faceplate rib for cooling as this rib will have to be removed to accommodate the faceplate I/O.
4. Conduction cooled host card may have to be configured to accept a specific conduction cooled mezzanine card, depending on use of optional thermal interfaces.

Do not specify or claim conformance to this draft standard

2.3 Theory of Operation and Usage

Conduction-cooled modules are used wherever convection cooling or forced air cooling is not possible or appropriate for the end-use application. For example, a CCA might consist of a PWB bonded to a conduction plate. The conduction plate is a metallic panel that conducts heat from CCA components to the edge of the CCA. The conduction plate is a three-dimensional part requiring small tolerances to ensure that it does not interfere with component leads and that it provides accurate location of the CCA in the chassis card slot. Conduction cooling can also be accomplished by embedding metal layers and thermal vias within the core of the PWB and/or incorporating optional metal inserts to match various component heights.

2.3.1 Component Layout

Conduction-cooled CCAs used in rugged and extended temperature environments present certain design challenges. Of prime concern is the layout of components to ensure efficient and effective heat transfer to card edge.

A number of principles can be stated that help define the component layout on a conduction-cooled CCA. In general, the heat flow is from the center line of the CCA to the thermal interface (or sink) normally located at the top and bottom edges. Components with a significant dissipation should be placed such that the thermal path to the CCA edge is minimized.

To ensure a robust mechanical implementation, typical implementations of CCAs using this specification would incorporate stiffening ribs that run along the height axis. Depending on the end application, one, two, or three stiffening ribs could be positioned between the connector and the front edge. The best mechanical support is along the edges of the CCA with good support along the stiffening ribs. High-dissipation parts would have priority at the card edge.

This specification allows for conduction cooled CCAs to have stiffening ribs that can be either fixed or removable.

Do not specify or claim conformance to this draft standard

Chapter 3

Conduction Cooled PCI Mezzanine Card Mechanics

3. Conduction Cooled PCI Mezzanine Card Mechanics

- Rule 3.1 CCPMC cards shall be designed to fit on all air cooled PMC fitted host cards. See Figure 3-1 CCPMC Mezzanine Module.
- Rule 3.2 Components on a CCPMC shall conform to the envelope specifications as defined in IEEE 1386 Common Mezzanine Card Specification Figure 5-20. The minimum height of a CCPMC connector shall be 10 mm. 8 and 9 mm heights are disallowed.
- Permission 3.1 A CCPMC may be single height or double height.
- Permission 3.2 A CCPMC mezzanine card may use fewer screw fastening locations than defined in Figure 3 as long as specified thermal and vibration specifications are met.
- Observation 3.1 CCPMC may not have front panel bracket fitted. However standard mounting holes are provided.
- Rule 3.3 CCPMC shall provide all features as per figure 3-1 CCPMC Mezzanine Module.
- Observation 3.2 1386 uses hard metric dimensions, hence PMC solder side component height is set to a hard metric dimension. CCPMC allows the solder side component height to the 1101.2 envelop which is in inch-based dimensions, hence CCPMC solder side envelope is higher than PMC solder side envelope.
- Rule 3.4 Electrical ground returns shall not be made through the thermal interface.

Do not specify or claim conformance to this draft standard

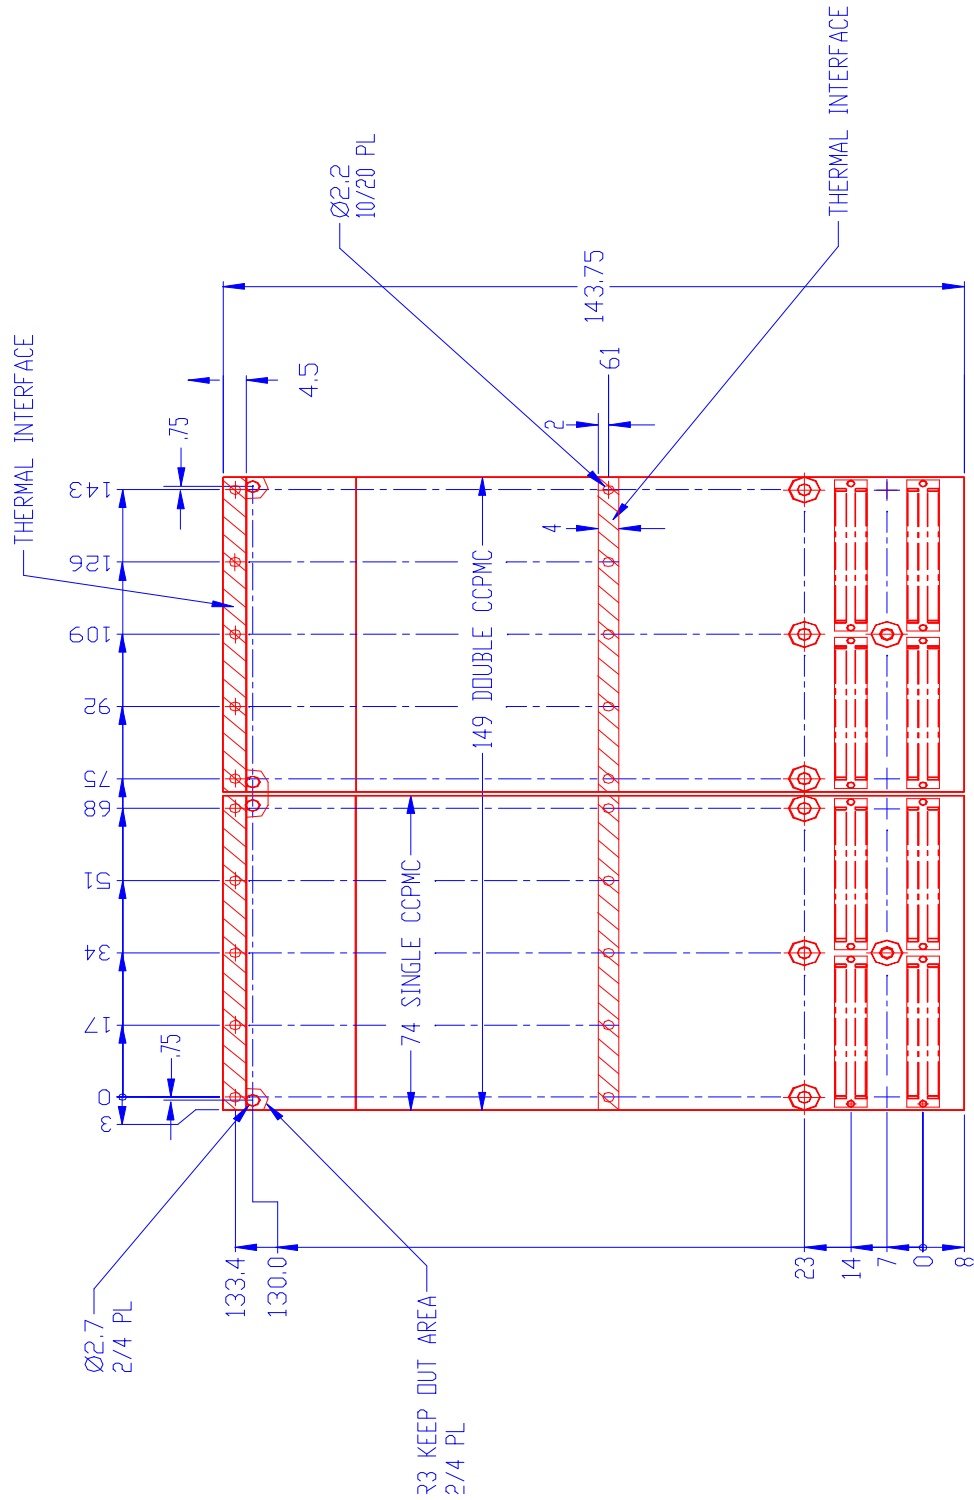


Figure 3-1 CCPMC Mezzanine Module

Do not specify or claim conformance to this draft standard

Chapter 4

Conduction Cooled Host Card Mechanics

4. Conduction Cooled Host Card Mechanics

- Rule 4.1 CCPMC cards shall fit on conduction cooled PMC host cards as per Table 1-1. See Figure 4-1 CCPMC Host Module.
- Rule 4.2 Components under a CCPMC mezzanine card shall conform to the envelope specifications as defined in IEEE 1386 Common Mezzanine Card Specification Figure 5-20. The minimum height of a CCPMC connector shall be 10 mm. The 8 and 9 mm heights are disallowed.
- Permission 4.1 A CCPMC host module may be designed with either fixed ribs or removable ribs.
- Permission 4.2 Conduction cooled host card may provide a mechanism to allow fitting of an air cooled PMC card.
- Observation 4.1 The thermal/stiffening ribs on a conduction cooled host card protrude into the space claim of an air cooled PMC module. These ribs may have to be removed to allow an air cooled PMC to fit onto the host card.
- Permission 4.3 A host card may be designed to hold one or two mezzanine cards.
- Rule 4.3 A host card shall provide all features as defined in Figure 4-1 CCPMC Host Module.
- Rule 4.5 Electrical ground returns shall not be made through the thermal interface.

Do not specify or claim conformance to this draft standard

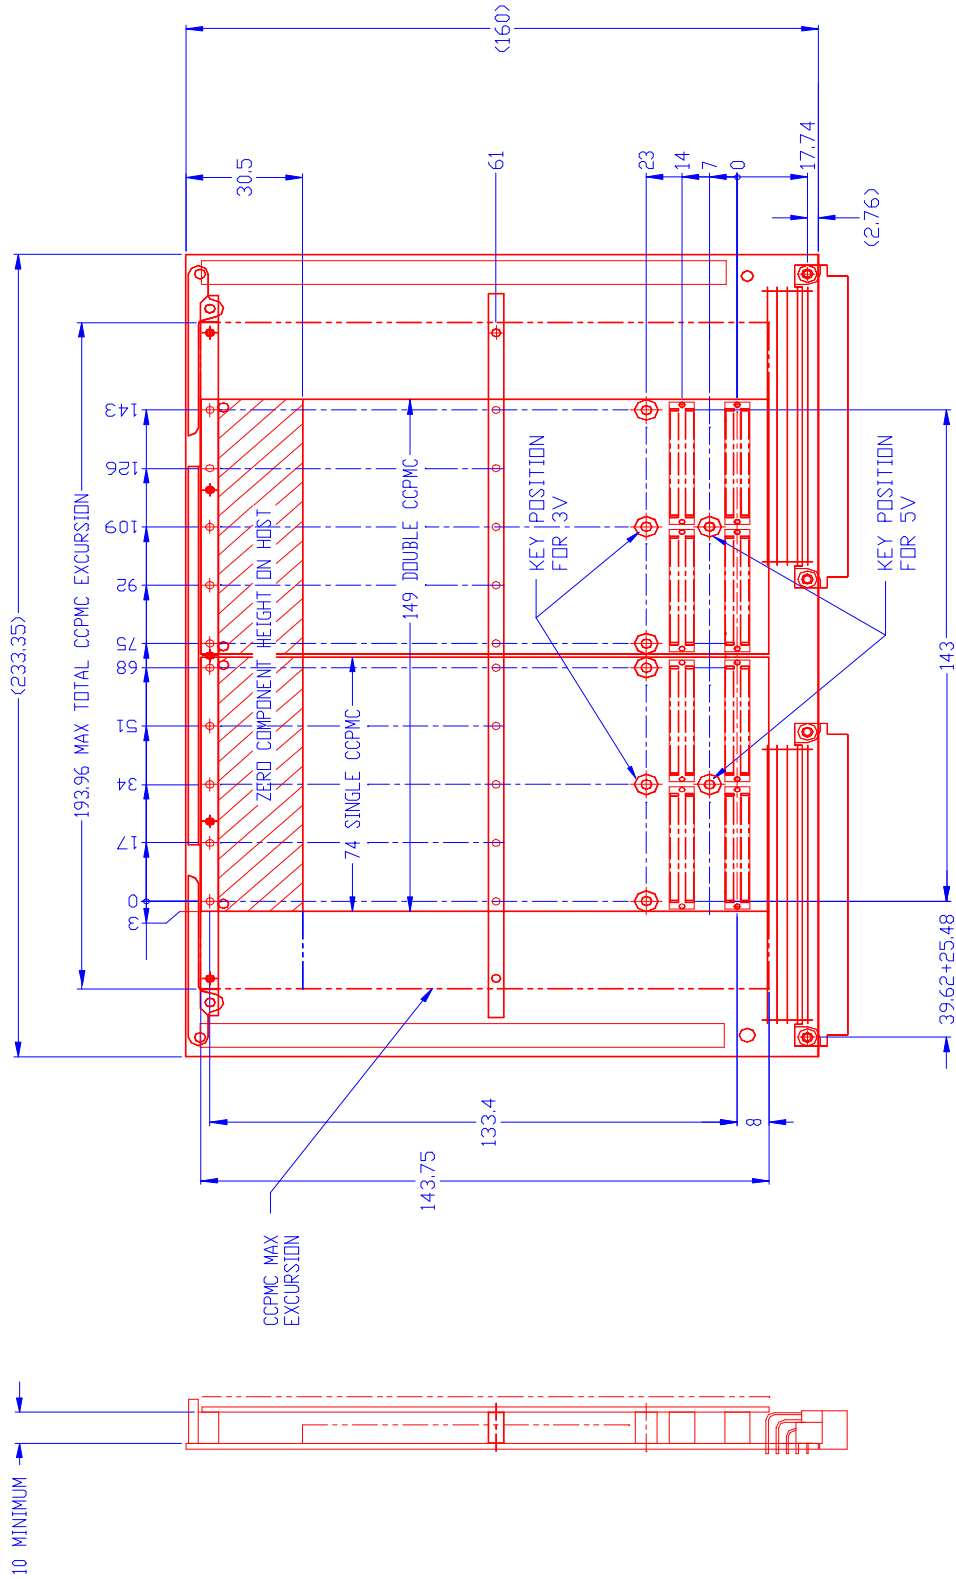


Figure 4-1 CCPMC Host Module

Do not specify or claim conformance to this draft standard

Chapter 5

Thermal Characteristics

5. Thermal Characteristic

- Rule 5.1 Primary thermal interfaces shall be mandatory for conduction cooled PMCs.
- Observation 5.1 PMCs may require secondary thermal interfaces for enhanced thermal performance.
- Permission 5.1 Secondary interfaces may be added to conduction cooled PMC on either side 1, side 2 or both sides of the module, per figure 5-2.
- Rule 5.2 Conduction cooled PMCs utilizing secondary thermal interfaces shall be designed for cooling from the primary interfaces and either the left or right secondary thermal interface.
- Permission 5.2 For host cards designed with a single conduction cooled PMC site only, provision can be made for cooling from both the left and right secondary thermal interfaces for enhanced thermal performance.
- Rule 5.3 Host card designs must be capable of being configured to accommodate all possible thermal interface specified in this standard.
- Observation 5.2 It is recognized that conduction cooled PMCs have been designed, built and delivered prior to the release of this standard and implementation of a secondary interface.
- Rule 5.4 Host card designs must not prohibit installation of Conduction Cooled PMC modules with components in a particular secondary thermal interface area.
- Rule 5.5 Thermal conducting surfaces of both the PMC and the host card shall be straight and have flatness of 0.002 mm per mm of length or better. The surface roughness shall be RMS 0.65 μm (24 μinches) or better.
- Observation 5.2 Flatness and surface finish are critical in attaining the thermal impedance requirement.

Do not specify or claim conformance to this draft standard

VITA 20-199x Draft Standard

- Rule 5.6 The thermal conducting surfaces of both the PMC and the host card shall be corrosion resistant or treated to resist corrosion.
- Observation 5.3 Corrosion products on conduction clamping surfaces have been shown to substantially degrade thermal performance over time.
- Permission 5.3 Aluminum structure may be sulfuric anodized and sealed to meet this rule, ref: ISO 7599.
- Observation 5.4 Hard anodizing is not recommended as the hard oxide case substantially inhibits heat transfer.
- Permission 5.4 Aluminum structure may be electroless nickel plated to meet this rule, ref: ISO 4527.
- Rule 5.7* PMC performance specification shall be based on typical power dissipation and maximum allowable thermal interface temperature(s).

Do not specify or claim conformance to this draft standard

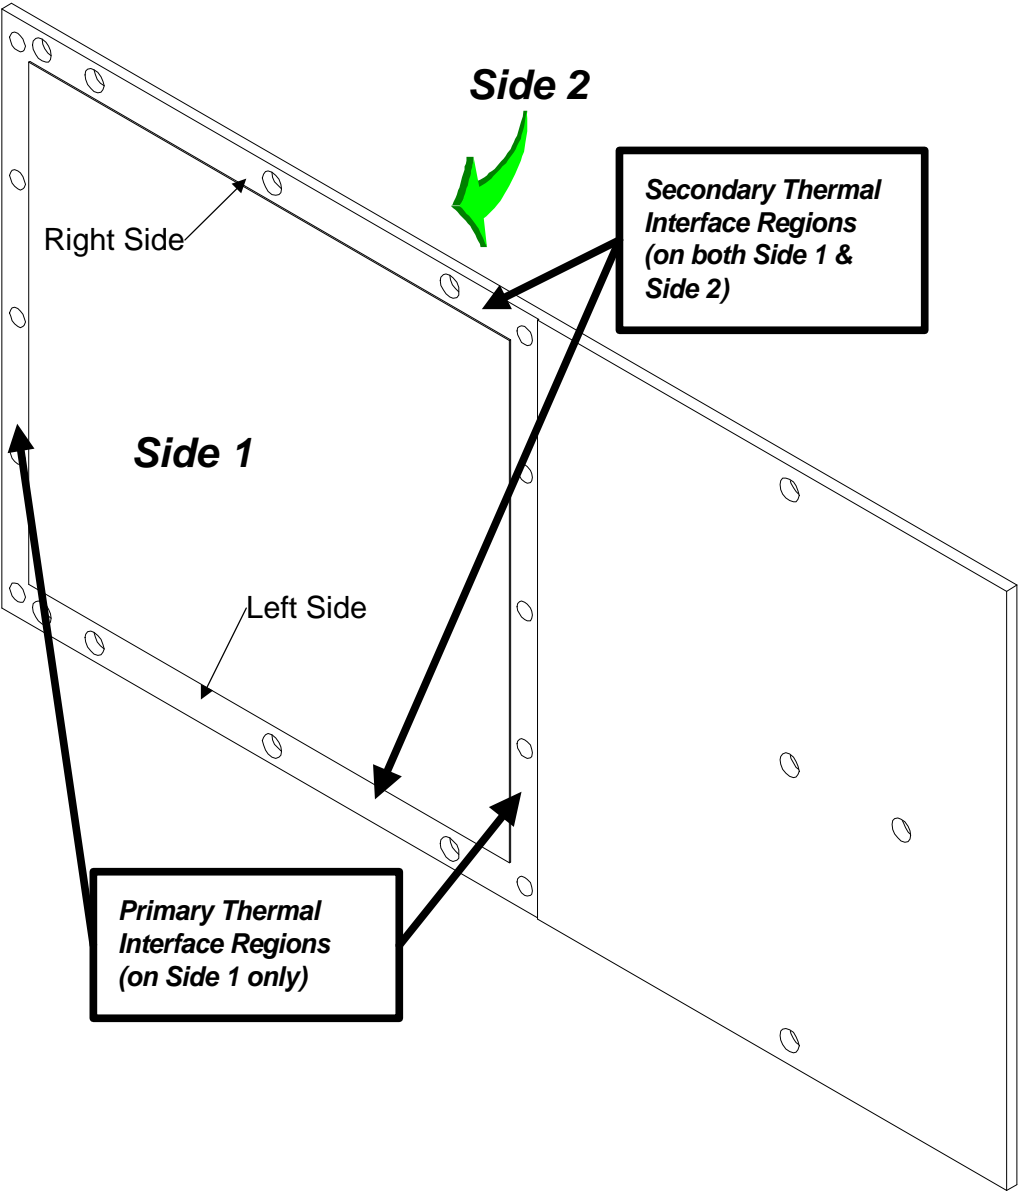


Figure 5-1 Thermal Interface Definitions

Do not specify or claim conformance to this draft standard