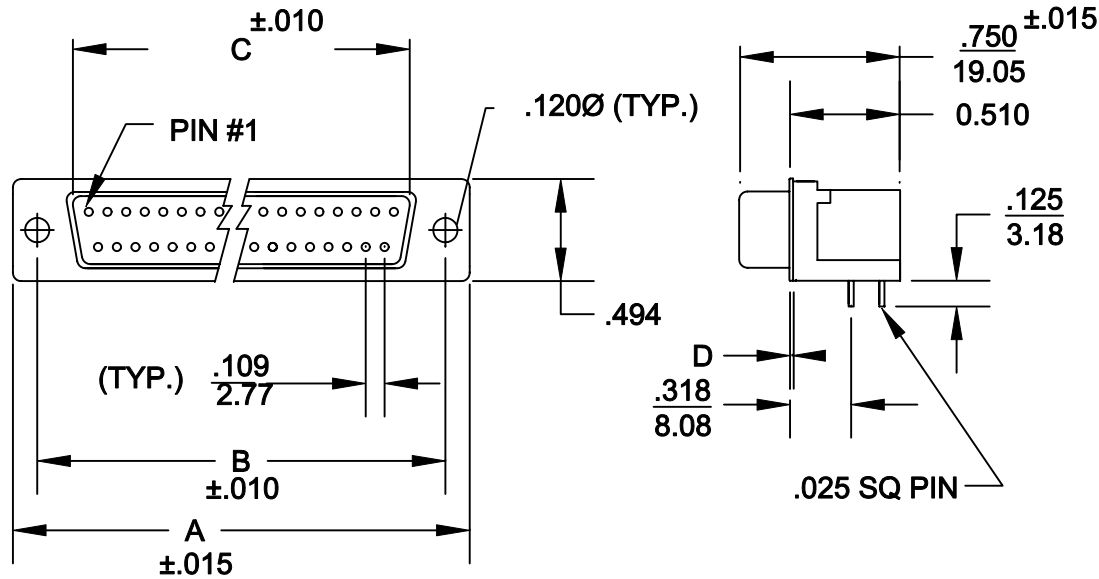
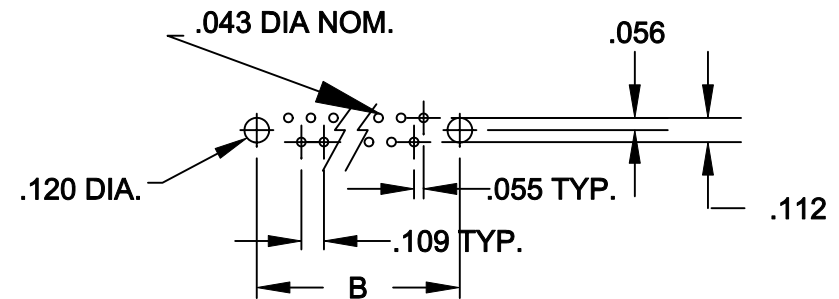


DESCRIPTION: R/A .318" MALE ECONOMY D-SUB  
RoHS COMPLIANT



	A	B	C	D
9	1.213	.984	.666	.015
	30.81	24.99	16.92	0.38
15	1.541	1.312	.994	.015
	39.14	33.32	25.25	0.38
25	2.088	1.852	1.534	.015
	53.04	47.04	38.96	0.38
37	2.729	2.500	2.181	.015
	69.32	63.50	57.30	0.38



**SPECIFICATIONS:**

**MATERIALS:**

- SHELL: STEEL, NICKEL PLATED
- INSULATOR: UL 94V-0 RATED BLACK-260 DEGREE NYLON - UL 94V-0
- CONTACTS: BRASS OR PHOSPHOR BRONZE

RoHS COMPLIANT

**ELECTRICALS:**

- CURRENT RATING: 5 AMPS
- DIELECTRIC STRENGTH: 1000V AC RMS
- INSULATOR RESISTANCE: 1000 MOHMS MIN
- TEMPERATURE: -55°C TO +105°C

182-XXX-113RXX1

SERIES \_\_\_\_\_

NUMBER OF CONTACTS \_\_\_\_\_

GENDER \_\_\_\_\_

1 = MALE

PC MOUNT \_\_\_\_\_

SHELL \_\_\_\_\_

3 = NICKEL

HARDWARE OPTIONS: \_\_\_\_\_

(SEE PAGE 2)

PLATING: \_\_\_\_\_

1 = GOLD FLASH

2 = 30 u" GOLD



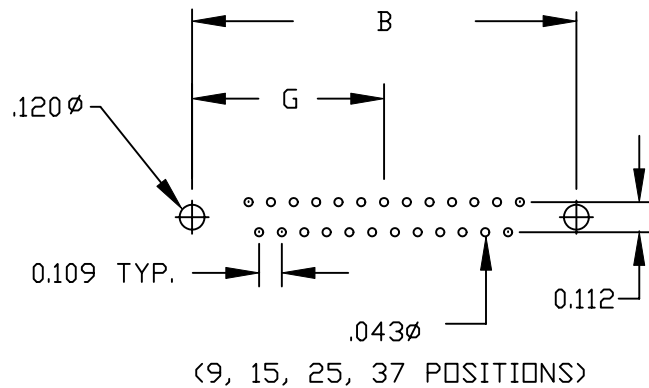
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: PAM JENKINS		DATE: 3-17-05	
CHECKED:		DATE:	
SCALE: 1:1	SHEET 1 OF 1	REV 3	
DWG NO. 182-XXX-113RXX1			

**NorComp**

DESCRIPTION: R/A .318" FEMALE ECONOMY D-SUB  
RoHS COMPLIANT

POS	B	G
9	<u>.984</u> 24.99	<u>.492</u> 12.50
15	<u>1.312</u> 33.32	<u>.656</u> 16.66
25	<u>1.852</u> 47.04	<u>.926</u> 23.52
37	<u>2.500</u> 63.50	<u>1.25</u> 31.75



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
**PAM JENKINS**

DATE:  
**3-17-05**

CHECKED:

DATE:

**NorComp**

SCALE:  
1:1








SHEET **2** OF **3**


REV **3**

DWG NO.

182-XXX-113RXX1

**DESCRIPTION:** R/A HARDWARE OPTIONS  
RoHS COMPLIANT

	 0.141±.020 METAL SHELL WITH INSIDE GROUND STRAPS	 METAL SHELL	 METAL SHELL FORK BOARD LOCKS
 .120" DIA. HOLE	16	43	N/A
 4-40 FLUSH INSERT	17	45	53 BOARD LOCKS IN HOLE
 4-40 HEX STANDOFF FEMALE SCREWLOCK	18	48	56 BOARD LOCKS IN HOLE
 4-40 ROUND STANDOFF FEMALE SCREWLOCK	N/A	N/A	N/A

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS	DATE: 3-17-05
			CHECKED:	DATE:
<b>NorComp</b>		SCALE:	SHEET <div style="display: flex; justify-content: space-around; align-items: center;"> <span style="font-size: 1.5em;">3</span> <span>OF</span> <span style="font-size: 1.5em;">3</span> </div>	REV <div style="text-align: right; font-size: 1.5em;">3</div>
		DWG NO. 182 HARDWARE		